

POWER FOR EVERYTHING YOU PLAN TO DO

The Holder S 75 – powerful and pavement-friendly

PROFESSIONAL | HOLDER S 75

THERE'S SOMETHING FOR EVERYONE KÄRCHER MUNICIPAL.

The right machine at the right time in the right place: with Kärcher Municipal machines, you have everything you need to complete your diverse daily tasks efficiently and comfortably. Climb aboard!



HOLDER S 75

- 4 Benefits at a glance
- 6 Vehicle design
- 8 Performance
- 16 Comfort cab
- 20 Traction drive
- 24 Safety
- 26 Maintenance and service
- 28 Technical data
- 30 Product overview

THE HOLDER S 75

Ergonomic operating console

Joystick

Comfortable cab

Powerful traction drive

Mechanical front PTO shaft

_____ 100% mechanical differential lock on both axles

Easy service access


Impressive manoeuvrability

Mechanical wheel load balancing



KNOWS YOUR HOME TOWN AS WELL AS YOU DO





The Holder S 75 combines superior performance with compact design perfect for urban settings.

We may not know where in the world you are clearing paths, de-icing pedestrian zones or tending green spaces. But we do know what makes a perfect implement carrier for your municipality: high power and durability, manoeuvrability and pavement-friendly design, sophisticated technical solutions, quick implement changes and straightforward operation.



The Holder S 75 has all this and more. Its articulated steering provides the agility, precision and tracking required for perfect results. The permanent all-wheel drive optimally distributes the power of the 75 hp engine to all four wheels. The compact width of minimum 1.31 m (depending on tyres) enables you to reach every nook and cranny in town. And, best of all, from the comfort of your cab, you can steer through even the toughest jobs with ease.

SUPERIOR PERFORMANCE ALL YEAR ROUND

Thanks to unique design features and technical solutions, the Holder S 75 can perform the most diverse range of tasks for you, all at the highest level.





The Holder S 75 is multifunctional and can be used in every season. In just a few steps, for instance, it can be converted to winter service, green space maintenance or watering.

Frost and ice are an inevitability. Thanks to the permanent all-wheel drive and four equal-sized wheels, the Holder S 75 provides outstanding traction even in wintry conditions. The smart load limit control is particularly effective when snow throwing. It ensures that the driving speed automatically adapts in response to the decrease in performance on the front implement.







Green space maintenance Ninter service

Wet cleaning

When tending green spaces in the summer months, you can't help but be impressed by the Holder S 75.

Flexible connection and attachment options, climbing ability and manoeuvrability, and high area performance mean you can mow and mulch in virtually all locations and conditions.

THE HOLDER S 75 WILL DO EVERYTH FOR YOU. EXCEPT COMPROMISE.

Want to mow and pick up green waste in the same process? No problem: with three implement spaces, a wide range of implement combinations are possible.

More flexible working, higher productivity, more impact: with three implement spaces, the Holder S 75 opens up a world of opportunities. The hydraulically tilting mounting frame in conjunction with an axle load of 3.2 tonnes enables implements to be mounted with optimum weight distribution, as the load is positioned centrally above the rear axle.

Quick implement changes

The thoughtfully engineered design with standardised interfaces makes changing implements on the Holder S 75 quick and easy. Front implements are attached via two coupling hooks on the front lifting system, rear implements simply slot onto the mounting frame.



REORMANCE



BENEFITS TO YOU

- Diverse applications
- Quick-change system
- Manoeuvrability using implements
- Low centre of gravity
- Simultaneous operation of two implement functions
- High productivity thanks to implement combinations

READY FOR ANYTHING

The powerful front linkage (CAT II) with a lifting force of 2,700 kg can handle even large, heavy implements.

One person can single-handedly and effortlessly attach or remove implements using the separate external control. A unique feature is the three-dimensional movement of the front linkage over the central hinge. You can use the joystick not only for raising and lowering, but also to adjust the tilt and move the implement sideways.



BENEFITS TO YOU

- Suitable for heavy implements
- Compatible with existing implements
- Perfectly adapts to the ground conditions
- Weight compensation for ground protection and higher traction
- No pendular compensation needed on the implement
- Side shift for more range Optimum results

With outputs of 0-100 l/min and 0-35 l/min, you have access to two extra drive options in addition to the mechanical PTO shaft.

High hydraulic performance • Compatible with existing hydraulic implements Multiple applications can be combined Compatible with PTO shaft, e.g. mowing suction

Thanks to the direct, low-loss mechanical drive shaft of the mechanical PTO shaft, implements with high power consumption can be operated

Lower fuel consumption No heating or mixing of the hydraulic oil Increased continuous power Larger implement dimensions

To balance out peak loads on transport journeys, the front linkage is fitted with hydraulic vibration damping.

Faster transport journeys Increased driving safety Improved driving comfort Protects vehicle and implement



A PERFECT FIT

The Holder S 75 comes with lots of handy features. You can expect a high level of driving and operational comfort whatever the weather.





Climb in, get comfy, and off you go in the ROPS comfort cab, you can enjoy perfect visibility and maximum comfort.

Even taller or heavier drivers will find the glazed cab of the Holder S 75 spacious and comfortable. The perfect conditions for long working days:

- 360° all-round visibility
- Air conditioning
- Air-sprung, heated comfort seat with optional 3-point seatbelt

All controls are within easy reach of the driver and are intuitive to operate. So working is straightforward and safe, and you avoid fatigue.

16

 Adjustable armrest fitted to the seat One-handed operation

 Most important functions on joystick, including forwards/reverse and control valve operation



YOUR NEW WORKSPACE

PUI

- Wide-opening doors
 Sliding windows
 Air-sprung comfort seat
 Operating console
 Integrated heater and air conditioning
 Heated windscreen
 Heated exterior mirrors
 LED working spotlights

1

I III

POWER IN EVERY SITUATION

Kärcher Municipal combines decades of municipality expertise with pioneering technology. Holder S 75 is testament to this.



Maximum transfer of traction

At the heart of the Holder S 75 drive train is the two-part transfer case positioned in the joint area. It distributes the power variably to the two axles as required, balancing out the traction differences. The result: a transfer of drive performance that is 100% at all times. The hydrostatic components built into the gearbox facilitate infinitely variable driving, while also maintaining all the benefits of a mechanical drive, such as mechanical gear reduction. When driving off-road or on slippery surfaces, you can switch on the mechanical differential locks as required, with 100% locking effect on both axles.

Clean, powerful and futureproof

The powerful 3.6 l Deutz turbo diesel engine meets the current requirements for STAGE V/Tier 4 Final emission standards without any additional SCR system (DEF). Thanks to the large cubic capacity, the maximum torque of 410 Nm and the maximum power of 75 hp apply even at 1,300 rpm. This makes light work of inclines or hill starts, even with heavy loads.



BENEFITS TO YOU

- Powerful yet quiet drive train
- 100% drive power at all times
- Extreme climbing ability
- Can be driven at extremely slow speeds
- Low consumption
- Futureproof with latest emissions standard
- No AdBlue needed
- Low-maintenance

Power that packs a punch

The engine delivers its maximum torque of 410 Nm from as little as 1,300 rpm, enabling you to work at lower engine speed.



Low centre of gravity for optimum driving stability

All the core components of the Holder S 75 drive train are incorporated deep within the vehicle. This results in superior driving stability for operations on and off the road. The ultra-wide tyres (440/50R18) with an external width of just 158 cm enable you to access even hard-to-reach areas, including on rough terrain. The position of the engine between the portal axles also makes the rear implement space extremely low for this class. This means that even with a spreader attached during winter service, you still have a clear view out the back.





Keep moving in green spaces

The electronic load limit control automatically adapts the driving speed in response to the decrease in performance on the front implement. The advantage: You can fully focus on the job in hand and keep moving at maximum working speed.

Patented DUAL DRIVE

The Holder S 75 boasts the patent-protected DUAL DRIVE, an infinitely variable drive concept that combines the benefits of hydrostatic transmission and mechanical gearing.

Benefits to you

- Intuitive and infinitely variable driving when working
- Increased traction in mechanical gear
- Reduces fuel consumption on transport journeys
- Protects the hydrostatic components

TECHNOLOGY DESIGNED **TO KEEP YOU** SAFE

The Holder S 75 has a comprehensive array of active and passive safety features.

Always on the safe side: countless features integrated into the design ensure the highest level of safety, in particular the load-dependent hydraulic wheel load compensation.


The patented system for the active stabilisation of pendular movements - a spring assembly built into the joint area - stabilises the vehicle when travelling over obstacles or on uneven terrain. The wheel load compensation ensures the vehicle continuously adapts to the ground conditions while also guaranteeing consistent driving stability.

Other safety features on the Holder S 75:

- ROPS cab
- Disc brakes, acting on all four wheels
- Automatic handbrake when the engine is switched off
- Rear-view camera
- Acoustic reverse warning system
- LED tail lights
- Seat contact switch
- Automatic battery isolating switch



WHEEL LOAD BALANCING







Ensures constant ground contact on all four wheels.

Benefits to you

Safety for turning on a slope, driving over the edges of pavements and for using large implements with a high centre of gravity, as well as softening the rolling motion when travelling on the road.



With easy access to all service components, the Holder S 75 is operational in next to no time.



It doesn't have to be difficult

The Holder S 75 has been purposefully designed to be easy to service. The cab can be tilted and the sides can be swivelled or folded to the left or right to open up access to vehicle components requiring maintenance. tilted even with implements still in place.

With the Holder S 75, there's no need to remove the implements before completing daily servicing tasks. This is thanks in part to the implement space, which can be hydraulically The battery can be accessed from outside, which makes things simpler if it ever needs jump starting in the winter for instance.

SERVICE AND MAINTENANCE

Well designed, well made

HOLDER S 75



Deutz TCD 3.6 4-cylinder common rail turbodieselPower55.4 kWMax. torque at 1300 rpm410 NmCubic capacity3,621 cm³Emission standardStage V/Tier 4 Final, exhaust gas treatment with DOC/DPF, no SCR (DEF)Fuel tank84 l

Drive

Fng

	Infinitely variable DUAL DRIVE traction drive system (combination of hydrostatic and mechanical drive) with permanent all-wheel drive and electronic load limit control
Speed	Driving speeds 0-40 km/h (fast gear)/0-20 km/h (slow gear); working speed 0-15 km/h (fast gear)/0-8 km/h (slow gear)
Differential lock	Front and rear mechanical with 100% locking effect
Service brake	Hydraulically activated wet disc brakes, active on all four wheels
Parking brake	Electric parking brake, active on both axles

Front PTO shaf

Speed

Switchable from 540 to 1,000 rpm at 1,700 rpm engine speed

Tandem numn volume f


Tandem pump volume flow	2 × 19 cm²/rev or 43.5 l/min at 180 bar, of which 0-40 l/min for implements, can be controlled from the cab, supply and return at the front and rear (optional), circuit independent of steering and lifting functions
Volume flow of implement variable dis- placement pump	0-120 l/min at 280 bar, of which 0-100 l/min for implements, can be controlled from the cab, supply and return at the front and rear (optional)
Hydraulic control units	Up to 4 double-acting control units
Hydraulic couplings	Up to 3 pairs of couplings at the front/up to 1 pair of couplings at the rear
Hydraulic tank	34 I with fill level sensor
Front power lift	CAT II, double-acting, with floating position and vibration damping system, optional electro-hydraulic implement release, hydraulic side and incline adjustment
Lifting force	2,700 kg

Weigh

	Includes driver of 75 kg; depending on tyre size and equipment
Unladen weight	3,100 kg
Total permissible weight	5,500 kg
Permissible axle load	Front: 3,200 kg/rear: 3,200 kg
Towing capacity	Unbraked: 2,500 kg/overrun braked: 4,500 kg

Dimensions

	Depending on tyres/dimensions with wheel 280/80R18
Wheelbase	1,827 mm
Total length incl. front power lift	3,750 mm
Total height	2,270 mm
Total outer width	1,310 mm
Turning circle radius outside	7,000 mm

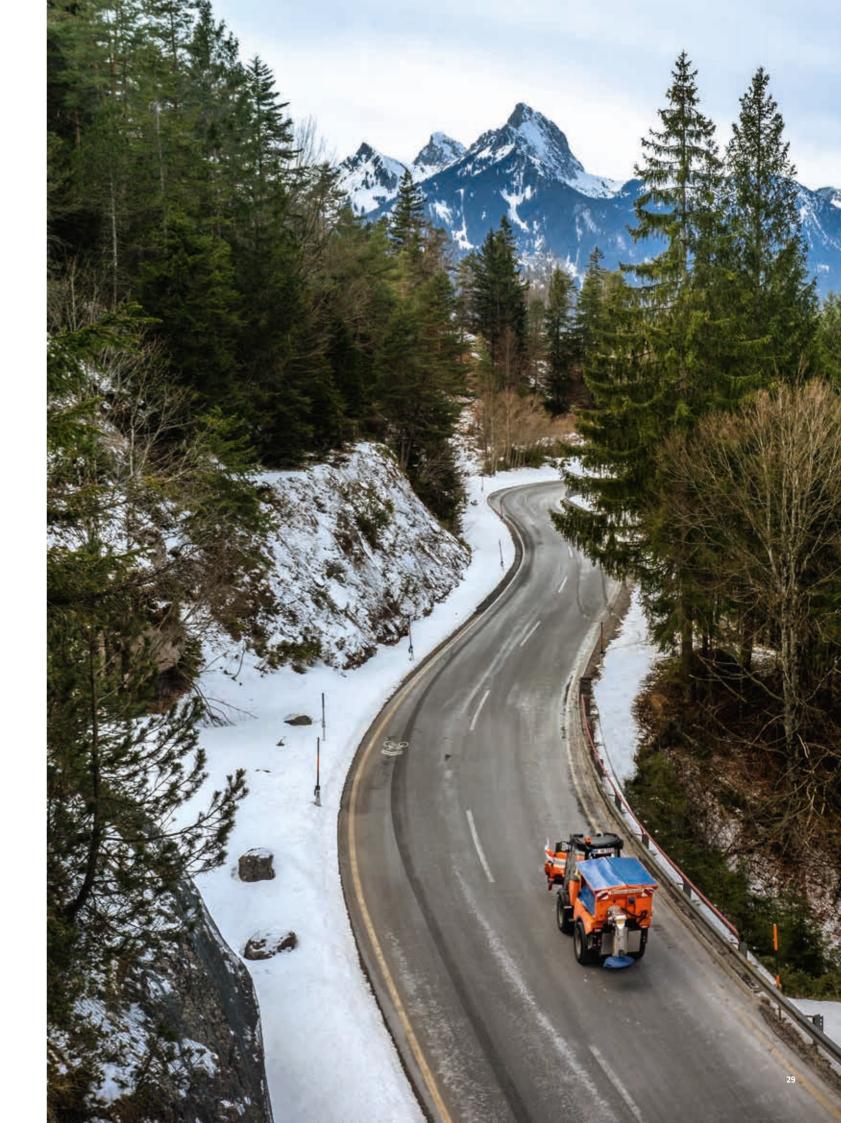



KÄRCHER MUNICIPAL IS THE ANSWER

Kärcher Municipal offers you a complete vehicle portfolio with a wide variety of models. From pure sweeper to extremely versatile implement carrier. In performance classes for every requirement.

Discover your all-rounder at www.kaercher-municipal.com

KARCHE

makes a difference

We would be happy to advise you:

Germany

Kärcher Municipal GmbH Mahdenstraße 8 72768 Reutlingen

Phone +49 7121 930729-0 Fax +49 7121 930729-213

info@municipal.kaercher.com www.kaercher-municipal.com

USA

Kärcher North America 6398 N. Karcher Way Aurora, CO 80019

Phone +1 800-444-7654 +1 866-271-0520 Fax

www.karcherna.com

Canada

Kärcher Canada Inc. 275 Pendant Drive Mississauga, Ontario L5T 2W9 Phone +1 905-364-5006 +1 905-672-3155 Fax www.karcher.ca

United Kingdom

Kärcher (UK) Ltd Kärcher House **Brookhill Way** Banbury Oxon OX16 3ED

Phone +44 1295-752-000 Fax +44 1295-752-103

www.karcher.co.uk

Ireland

Kärcher Ltd (Ireland) Unit 3, Redcow Retail Centre Robinhood Road Ballymount, Dublin 22 D22 PY03 Phone +353 1-409-7777 +353 1-409-7775 Fax www.karcher.ie

South East Asia

Regional Head Office South East Asia Karcher South East Asia Pte Ltd 3 Depot Close #05-01 Singapore 109840

Phone +65 6897-1811 Fax +65 6897-1611 www.karcher.com.sg

Hong Kong

Kärcher Limited Unit 01, 22/F, Westley Square 48 Hoi Yuen Road Kwun Tong, Kowloon Phone +852 2-357-5863

+852 2-357-5632 www.karcher.com.hk

Australia

Fax

Karcher Ptv Ltd 385 Ferntree Gully Road Mount Waverley Victoria, AU 3149 Phone 1800 675-714 (Free Call) www.karcher.com.au

New Zealand

Karcher Ltd 66 Allens Road East Tamaki Auckland 2013 Phone +64 9-274-4603 Fax +64 9-274-6932 www.karcher.co.nz

North Africa

Kärcher SARL Immeuble Yasmine Tower Bloc A 6ème étage, bureau A 6.6 Centre Urbain Nord 1082 Tunis Tunisia

Phone +216 36339020

info@tn.kaercher.com www.kaercher.tn

East Africa

Karcher Limited **Regus Fortis Office Park** P. O. Box 66488-00800 Block C, Ground floor Muthangari Drive Westlands, Nairobi Kenva

Phone +254 205148145

info@ke.kaercher.com www.kaercher.com/ke

South Africa

Kärcher (Pty) Ltd Cnr Mount Joy & George Allen Rd Wilbart Ext. 2 PO Box 11818 Vorna Valley, 1686

Phone +27 11-657-7300 Fax +27 11-657-7440

www.karcher.co.za

Middle East

Karcher FZE Quality Cleaning Systems Jebel Ali Free Zone Plot No. S-10104 South Zone RA 08, XB 1, Jebel Ali Dubai

Phone +971 4-886-1177 +971 4-886-1575 Fax

customercare@ae.kaercher.com www.karcher.ae

Qatar

Karcher LLC Office No 133, Regus Building D Ring Road PO Box 35176

Phone +974 4-423-1319

customercare@ae.kaercher.com www.kaercher.ae

Caribbean

Karcher S.R.L. Calle 5ta, esq. Calle 18, Nave 1 Villa Aura Santo Domingo Oeste Dominican Republic

Phone +1 809-379-3700 Fax +1 809-379-3777

info@do.kaercher.com www.kaercher.com/do MI/Po ·

Optimal advice, sales and service with your Kärcher Municipal partner: